



Specification

Version:V00

Picture

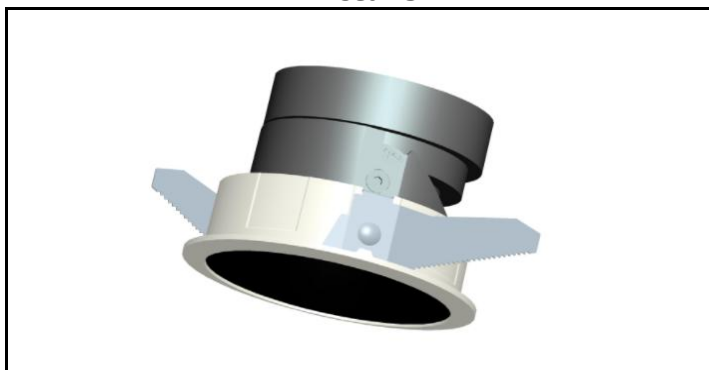


Drawing

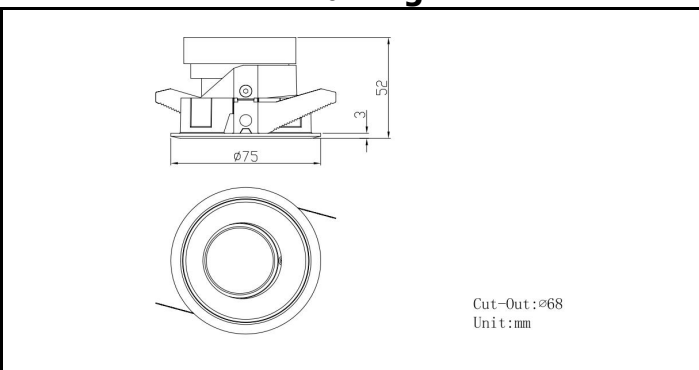

产品特点

- ◆ Power from 6W to 15W, etc.
- ◆ Round and heat dissipation design ensures the long service life of lamps.
- ◆ External drive, smooth and beautiful design.
- ◆ Adopt American brand COB (Puri Light Source).

Photometric data

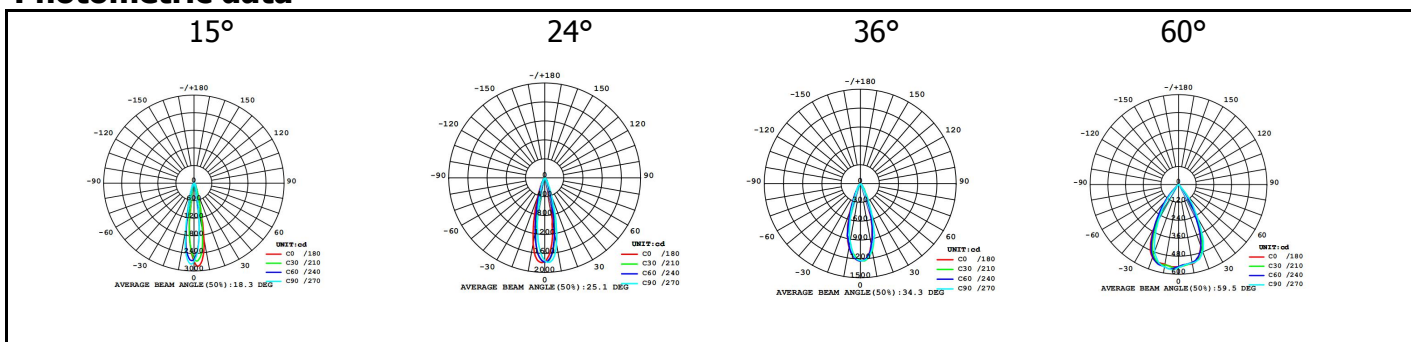

Product Specification

Type	Adjustable	Power	8W
Beam	15°/24°/36°/60°	Chip Brand	Bridgelux
Material	Die casting aluminum	CCT	2700K/3000K/3500K/4000K
Treatment	Matte Material	Lumen	507LM/475LM/488LM/506LM
Colour	Black/White	CRI	90
IP Class	IP54	Driver	Lifud-Power(Remote driver)
Certification	CE	Input voltage	200-240VAC 50/60Hz
Life span	25000H	PF	>0.5
cut hole	$\varnothing 68\text{mm}$	Dim type	On-off/ TraicDimming
Size	$\varnothing 75 \times 52\text{mm}$	Output voltage	33-42V
Optical	Len	output current	180mA

Packing info

Packing	NW	Inner box	Carton Size
1PCS/CTN 5x5x2PCS/BOX	0.195Kg	SIZE : 105*85*120mm GW : 0.231Kg	Size : 550*450*260mm GW : 9.9Kg