

SMD Rectangle

LED RECESSED

1B0120113

WHITE

1B0120123


BLACK




Location : INDOOR

Fixation : CEILING RECESSED

Cutout shape/size	180 mm
Recessed depth	12 mm
Thickness of mounting surface	5 - 25 mm
Colors available	white/black
Information	LED COB 20W/30W
Driver	Integrated built in 1-10V/triac/dali/DMX512 dim
CRI	>90
IP	IP20

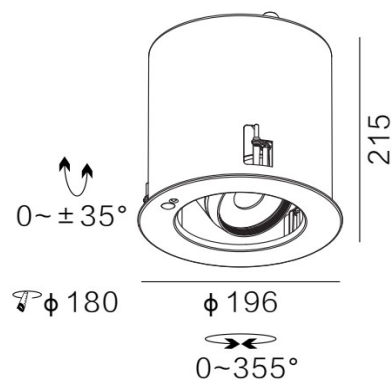

other options:

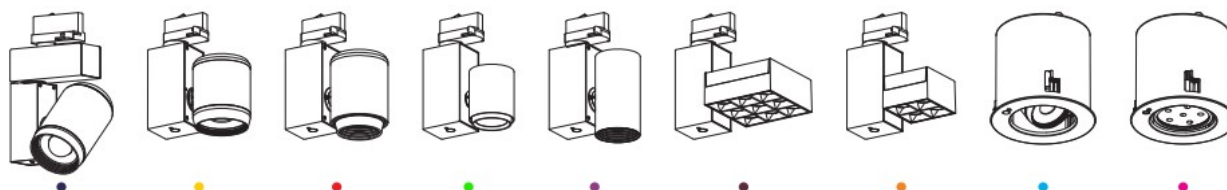

B • A • L

BEST ARCHITECTURAL LIGHTING



0~355° 水平旋转
0~355° Horizontal rotation



0~±85° 垂直旋转
0~±85° Vertical rotation



15~60° 光束角调节
15~60° Beam Angle control



亮度调节
Brightness control



2700~5000K色温变化
Color temperature variation between 2700 and 5000K



超远距离遥控 (30m)
Ultra-far distance remote control (50m)





故障自检
Breakdown self check



情景模式管理
Situational mode management




过热保护 (温度超过预设值时, 自动降低功率输出)
Overheat protection (automatically reduces power output when the temperature exceeds the preset value)

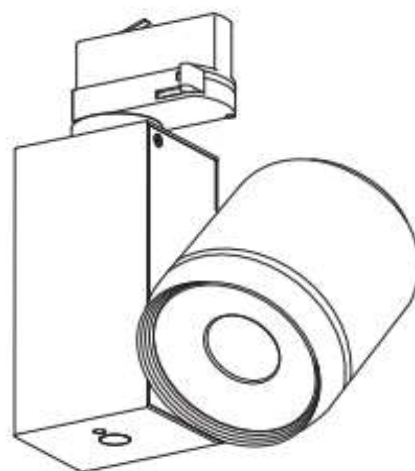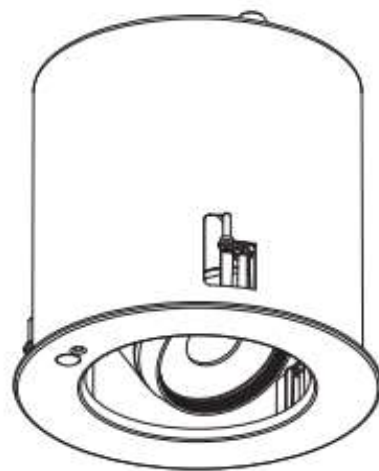

安装方式

Installation mode



控制方式

Control mode



Add: No. 44, Zhongkeng Industrial Zone, Shipai Town, Shipai Town, Dongguan City, Guangdong, China

Web bal-lighting.com

Email: admin@bal-lighting.com